

**Features**

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- TC, RTD, potentiometer or voltage input
- Current output 0/4 mA ... 20 mA
- Sink or source mode
- Configurable by **PACTwareJ™**
- Line fault (LFD) and sensor burnout detection
- Up to SIL2 acc. to IEC 61508

**Function**

This isolated barrier is used for intrinsic safety applications. It is designed to connect RTDs, thermocouples, or potentiometers in the hazardous area, and provide a proportional 0/4 mA ... 20 mA signal to the safe area.

The barrier offers 3-port isolation between input, output, and power supply.

A removable terminal block K-CJC-\*\* is available for thermocouples when internal cold junction compensation is desired.


A fault is indicated by a red flashing LED per NAMUR NE44 and user-configured fault outputs.

The unit is easily programmed with the **PACTware™** configuration software.


A collective error messaging feature is available when used with the Power Rail system.

For additional information, refer to the manual and [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

**Assembly**

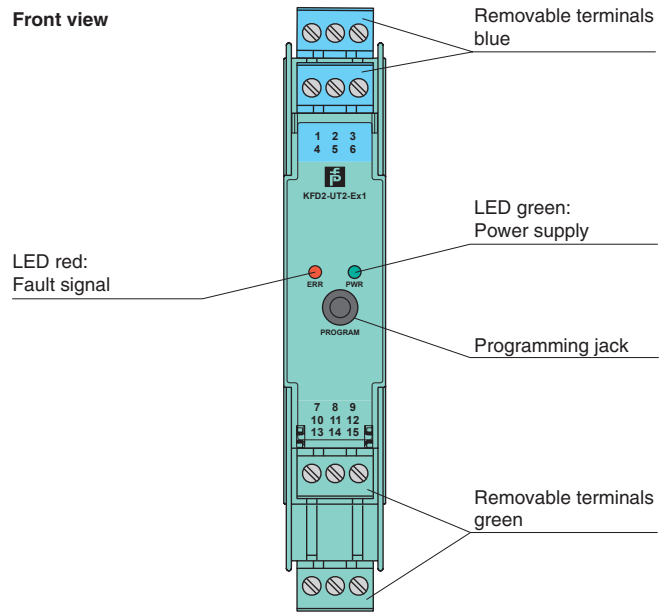

**Connection**

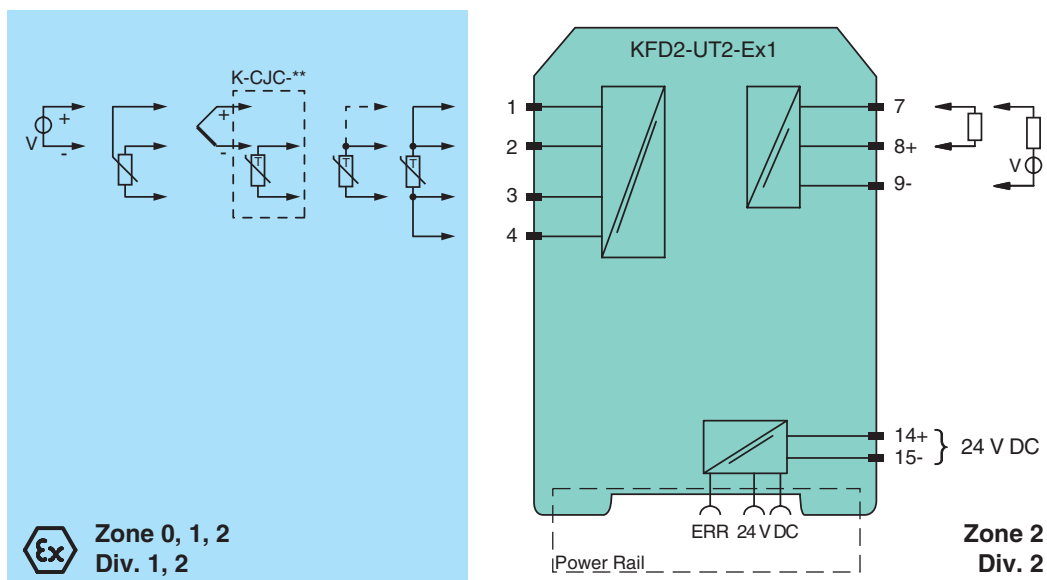

Release date 2010-03-19 08:33 Date of issue 2010-03-19 11:6917\_ENG.xml

<b>General specifications</b>	
Signal type	Analog input
<b>Supply</b>	
Connection	terminals 14+, 15- or power feed module/Power Rail
Rated voltage	20 ... 30 V DC
Ripple	within the supply tolerance
Power loss/power consumption	≤ 0.95 W / 0.95 W
<b>Input</b>	
Connection	terminals 1, 2, 3, 4
RTD	type Pt10, Pt50, Pt100, Pt500, Pt1000 (EN 60751: 1995) type Pt10GOST, Pt50GOST, Pt100GOST, Pt500GOST, Pt1000GOST (6651-94) type Cu10, Cu50, Cu100 (P50353-92) type Ni100 (DIN 43760)
Measuring current	approx. 200 µA with RTD
Types of measuring	2-, 3-, 4-wire connection
Lead resistance	≤ 50 Ω per lead
Measuring circuit monitoring	sensor burnout, sensor short-circuit
Thermocouples	type B, E, J, K, N, R, S, T (IEC 584-1: 1995) type L (DIN 43710: 1985) type TXK, TXKH, TXA (P8.585-2001)
Cold junction compensation	external and internal
Measuring circuit monitoring	sensor burnout
Voltage	selectable within the range -100 ... 100 mV
Potentiometer	0 ... 20 kΩ (2-wire connection), 0.8 ... 20 kΩ (3-wire connection)
Input resistance	≥ 1 MΩ (-100 ... 100 mV)
<b>Output</b>	
Connection	output I: terminal 7: source (-), sink (+), terminal 8: source (+), terminal 9: sink(-)
Output	Analog current output
Current range	0 ... 20 mA or 4 ... 20 mA
Fault signal	downscale 0 or 2 mA, upscale 21.5 mA (acc. NAMUR NE43)
Source	load 0 ... 550 Ω open-circuit voltage ≤ 18 V
Sink	Voltage across terminals 5 ... 30 V. If the current is supplied from a source > 16.5 V, series resistance of $\geq (V - 16.5)/0.0215 \Omega$ is needed, where V is the source voltage. The maximum value of the resistance is $(V - 5)/0.0215 \Omega$ .
<b>Transfer characteristics</b>	
<b>Deviation</b>	
After calibration	<u>Pt100</u> : ± (0.06 % of measurement value in K + 0.1 % of span + 0.1 K (4-wire connection)) <u>thermocouple</u> : ± (0.05 % of measurement value in °C + 0.1 % of span + 1 K (1.2 K for types R and S)) this includes ± 0.8 K error of the cold junction compensation <u>mV</u> : ± (50 µV + 0.1 % of span) <u>potentiometer</u> : ± (0.05 % of full scale + 0.1 % of span, (excludes errors due to lead resistance))
Influence of ambient temperature	deviation of CJC included: <u>Pt100</u> : ± (0.0015 % of measurement value in K + 0.006 % of span)/K $\Delta T_{amb}^{*)}$ <u>thermocouple</u> : ± (0.02 K + 0.01 % of measurement value in °C + 0.006 % of span)/K $\Delta T_{amb}^{*)}$ <u>mV</u> : ± (0.005 % of measurement value + 0.006 % of span)/K $\Delta T_{amb}^{*)}$ <u>potentiometer</u> : ± 0.006 % of span/K $\Delta T_{amb}^{*)}$ $^{*)} \Delta T_{amb}$ = ambient temperature change referenced to 23 °C (296 K)
Influence of supply voltage	< 0.01 % of span
Influence of load	≤ 0.001 % of output value per 100 Ω
Reaction time	sensor burnout and sensor short circuit selected where appropriate mV: 1 s, thermocouples with CJC: 1.1 s, thermocouples with fixed reference temperature: 1.1 s, 3- or 4-wire RTD: 920 ms, 2-wire RTD: 800 ms, Potentiometer: 2.05 s
<b>Electrical isolation</b>	
Output/supply, programming input	functional insulation acc. to IEC 62103, rated insulation voltage 50 V <sub>eff</sub> There is no electrical isolation between the programming input and the supply. The programming cable (see section accessories and installation) provides galvanic isolation so that ground loops are avoided.
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2004/108/EC	EN 61326-1:2006
<b>Conformity</b>	
Protection degree	IEC 60529
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>	
Protection degree	IP20
Mass	approx. 130 g

Release date 2010-03-19 08:33 Date of issue 2010-03-19 11:59:17\_ENG.xml

Dimensions	20 x 119 x 115 mm (0.8 x 4.7 x 4.5 in) , housing type B2
<b>Data for application in connection with Ex-areas</b>	
EC-Type Examination Certificate	CESI 04 ATEX 143 , for additional certificates see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a>
Group, category, type of protection	⊕ II (1)G [EEx ia] IIC [circuit(s) in zone 0/1/2]
Input	EEx ia IIC
Inputs	terminals 1, 2, 3, 4
Voltage $U_o$	9 V
Current $I_o$	22 mA
Power $P_o$	50 mW
Analog outputs, power supply, collective error	
Maximum safe voltage $U_m$	250 V (Attention! This is not the rated voltage.)
Interface	
Maximum safe voltage $U_m$	250 V (Attention! The rated voltage is lower.), RS 232
Statement of conformity	
Group, category, type of protection, temperature classification	⊕ II 3G Ex nA II T4 X
Electrical isolation	
Input/Other circuits	safe galvanic isolation acc. to EN 50020, voltage peak value 375 V
Directive conformity	
Directive 94/9/EC	EN 50014, EN 50020 , EN 60079-15
<b>International approvals</b>	
CSA approval	
Control drawing	366-0024CS-12B (cCSAus)
<b>General information</b>	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

## Accessories

### Power feed modules KFD2-EB2...

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 100 individual devices depending on the power consumption of the devices. A galvanically isolated mechanical contact uses the Power Rail to transmit collective error messages.

### Power Rail UPR-03

The Power Rail UPR-03 is a complete unit consisting of the electrical inset and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

**The Power Rail must not be fed via the device terminals of the individual devices!**

### K-CJC-\*\*

This removable terminal block with integrated temperature measurement sensor is needed for internal cold junction compensation for thermocouples. One K-CJC-\*\* is needed for each channel.

### PACT<sub>ware</sub>™

Device-specific drivers (DTM)

### Adapter K-ADP1

Programming adapter for parameterisation via the serial RS 232 interface of a PC/Notebook

For programming, please use the new version of adapter K-ADP1 (part no. 181953, connector length 14mm). When using the previous version K-ADP1 (connector length 18 mm) the plug is exposed by approx. 3 mm. The function is not affected.

### Adapter K-ADP-USB

Programming adapter for parameterisation via the serial USB interface of a PC/Notebook